


SCOOTER



- Extremely compact size
- Outside panels in st/st
- 9 decks not removable rack supplied as standard
- FAST AIR automatic steam exhaust system
- Separate circuits for fumes and baking air
- Heat generator with armored electric elements (SE)
- Automatic start
- Faceplate/hood without fan
- Double glass door capable of opening up to 160 °
- N.3 halogen lamps in the baking chamber
- Electric board included in the overall dimensions of the oven, inside the base (or proofer)
- Base or proof box on wheels

Line feeder	400/3N~/50 Scooter 230/1~/50 cell
Water Inlet	Diameter 1/2"
Gas pipe inlet	Diameter 3/4"
Fumes exhaust	Diameter 150 mm
Steam exhaust	Diameter 120 mm

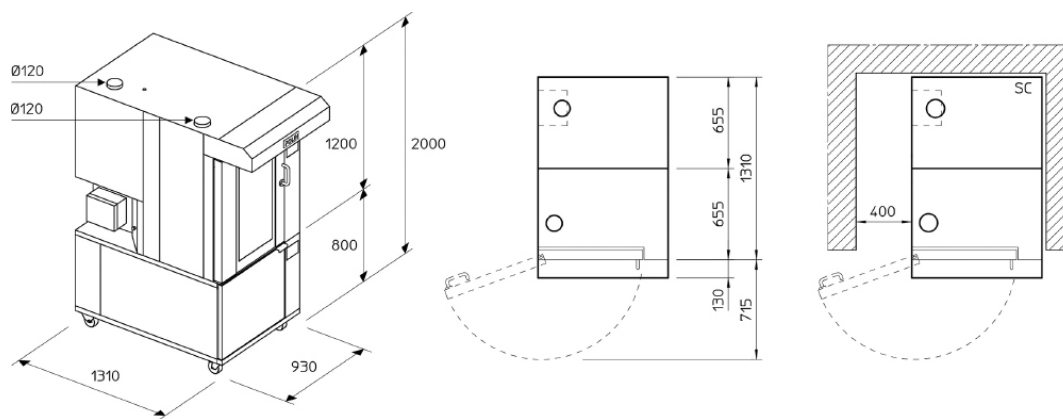

	Pan capacity		Pan size	Cooking surface	Weight	Minimum door width	Aux electrical power	Burner capacity	Electrical power
	n°	pass	mm	m ^q	kg	mm	kW	kcal/h (kW)	kW
SCOOTER 4060 SC	9	90	400x600	2,16	300	730	1,4	18.000	-
SCOOTER 4060 SE	9	90	400x600	2,16	300	730	1,2	-	13,8
CELL	14	80	400x600	-	80	670	-	-	2

OPTIONAL

OVEN

- Oven shipped in 2 preassembled elements (fast installation) or completely assembled
- Extractable trolley
- Burner for natural gas or LPG included in the overall dimensions of the oven (SC)
- Integrated air steam condenser
- Burner or electric elements on the right side
- Steam with liter-counter

PROOF-BOX

- Armored electric element with thermostat for heating
- Water basin with electric element for humidity
- Inner ventilation for even air distribution
- Digital keyboard supplied as standard
- Humidity control kit (optional)